



CURVE CARATTERISTICHE - PERFORMANCES

Pompa tipo - Pump type

BOXR-A 0,25kW

COSTANTI DI PROVA - TEST CONSTANTS

n = 2850 1/min

t = 15°C

$\rho = 1000 \text{ kg/m}^3$

\varnothing gir./impeller = 79,3 mm

h - pale/blades = 12,8 mm

n° pale/blades = 6

TABELLA N°

A1000001


16/05/2008 Rev-0

1" G - DN25

DN (aspirazione pompa - pump suction)

1" G - DN25

DN (mand. pompa - pump delivery)

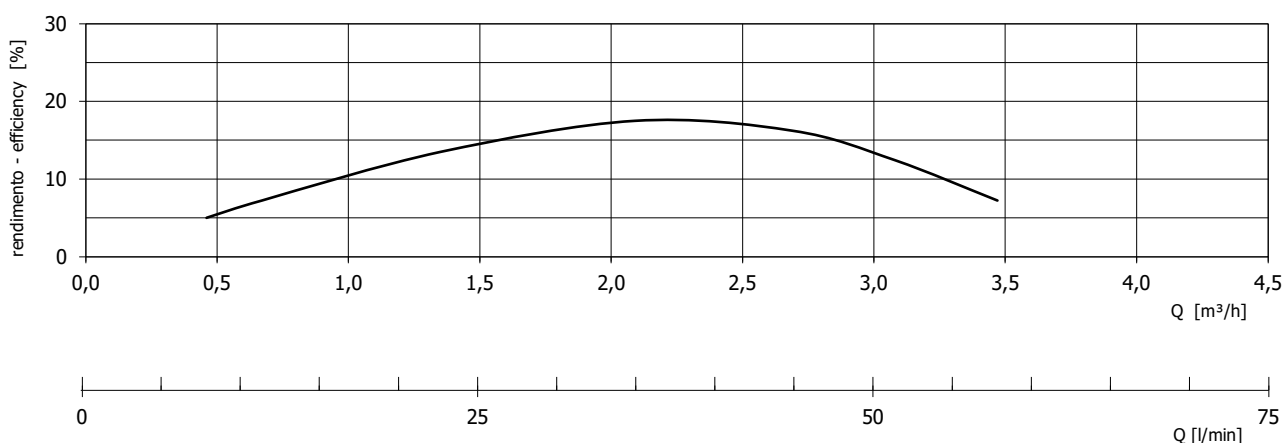

Le caratteristiche di funzionamento e di targhetta si intendono per servizio continuo ed acqua pulita, con altezza manometrica massima di aspirazione di 1 m c.a. Per altezze manometriche superiori e fino ad un massimo di 6 m c.a., le caratteristiche si riducono nei valori di portata. La tubazione aspirante deve essere assolutamente stagna. The operating characteristics of the label are to be understood for continuous service and with clear water a max manometric suction height of approximately 1 m. For higher manometric heights and up to a max of approximately 6 m, the characteristics decrease in the various delivery data. The suction piping be absolutely hermetic.

BOXR-A

Asse nudo / puleggia

IASA1001

N° disegno

Data 12/2013 Rev-A

